

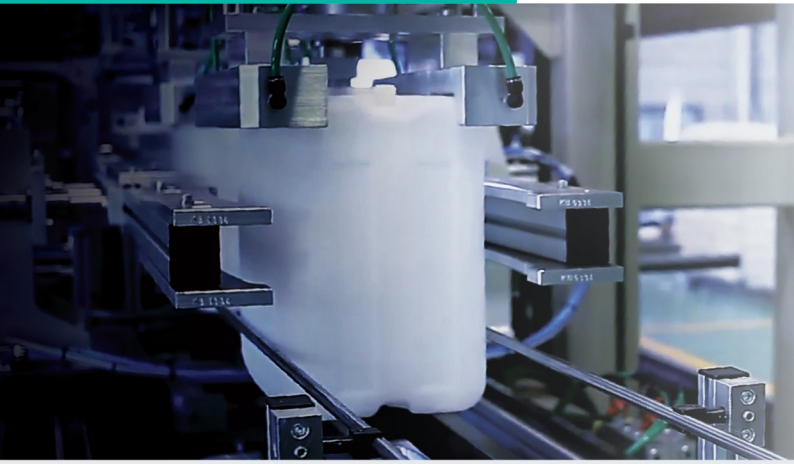



Sabmann Blasformtechnik

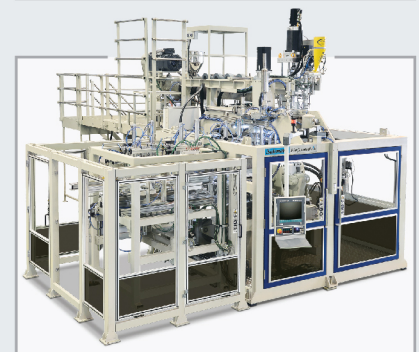

High performance extrusion blow moulding machine for the Production of High Quality Plastic Packaging 20 - 60 Liters

- Fully electric or hydraulic
- Single or Double station, Single layer, continuous extrusion
- Outstanding performance, productivity and reliability
- Top product quality through proprietary extrusion technology cooperation with MAUSER
- Bottom blow or Top blow with integrated after cooling and deflashing unit
- Standard machine components by well-known German / European makers
- Easy to use control system
- Compact, long life and easy maintenance designs
- Remote service via Internet

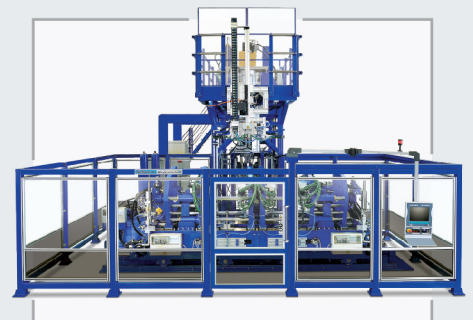

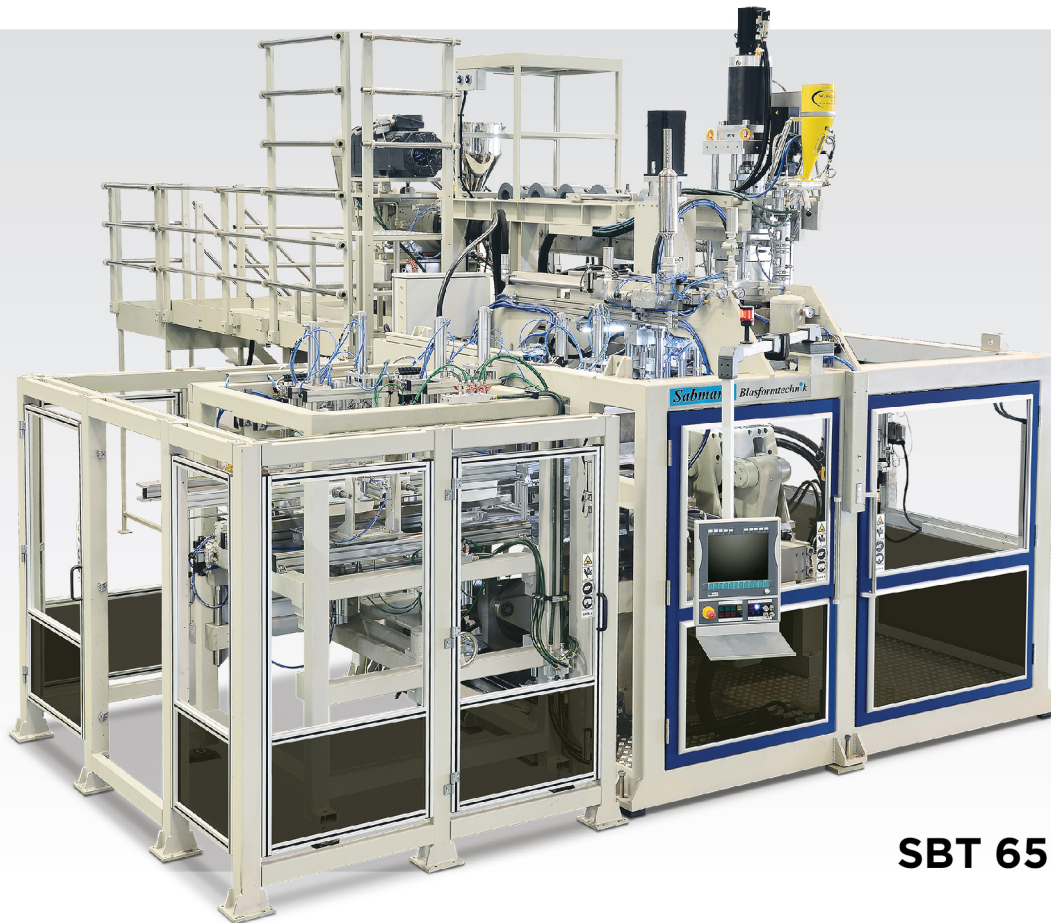

SBT 650S

FULLY ELECTRIC High performance blow moulding for the production of High Quality Plastic Packaging 20-30 L

Blow moulding machine Type		SBT 650S Top Blow
		Single Station Single Head
Product volume	L	20-30L
Machine output (20L, 1kg)		≥ 100
Clamping force	kN	350
Mould width	mm	550
Mould Thickness	mm	2 x 250
Mould height	mm	800
Mould opening stroke	mm	340-360
Screw Diameter/Length		90/30D
Melting capacity	kg/h	≥250
Electric drive/heating	kW	165/60
Total connected load	kW	225
Average consumption	kWh	90
Machine width	mm	6500
Machine length	mm	8500
Machine height	mm	6000

SAB PLASTMACH CO., LTD.

134 M4,T.Tub Khang, A.Khao Yoi,
Phetchaburi 76140, Thailand

Phone: +6632.797.444
Fax: +6632.797.451

www.sabmann.com

sab@sabplas.com
sabmann-ebm@t-online.de